



Universal converter

9116B

- Input for RTD, TC, Ohm, potentiometer, mA and V
- Supply for 2-wire transmitters
- Active / passive mA output and relay output
- Can be supplied separately or installed on power rail, PR type 9400
- SIL 2-certified via Full Assessment



Advanced features

- Configuration and monitoring by way of detachable display front (PR 4501); process calibration, signal and relay simulation.
- Advanced relay configuration, e.g. setpoint, window, delay, sensor error indication and power monitoring.
- Copying of the configuration from one device to others of the same type via PR4501.
- Reduced Uo Ex data < 8.3 V for active input signals.
- TC inputs with internal CJC or external CJC for higher accuracy.
- The device automatically detects whether it must supply an active or a passive current signal.

Application

- 9116B can be mounted in the safe area and in zone 2 / cl. 1 div. 2 and receive signals from zone 0, 1, 2 and zone 20, 21, 22 including M1 / Class I/II/III, Div. 1, Gr. A-G.
- Conversion and scaling of temperature, voltage, potentiometer and linear resistance signals.
- Power supply and signal isolator for 2-wire transmitters.
- Monitoring of error events and cable breakage via the individual status relay and/or a collective electronic signal via the power rail.
- The 9116 has been designed, developed and certified for use in SIL 2 applications according to the requirements of IEC 61508.


Technical characteristics

- 1 green and 1 red front LED indicate operation status and malfunction. 1 yellow LED indicates relay status.
- 2.6 kVAC galvanic isolation between input, output and supply.

Mounting

- The devices can be mounted vertically or horizontally without distance between neighbouring units.

Connections

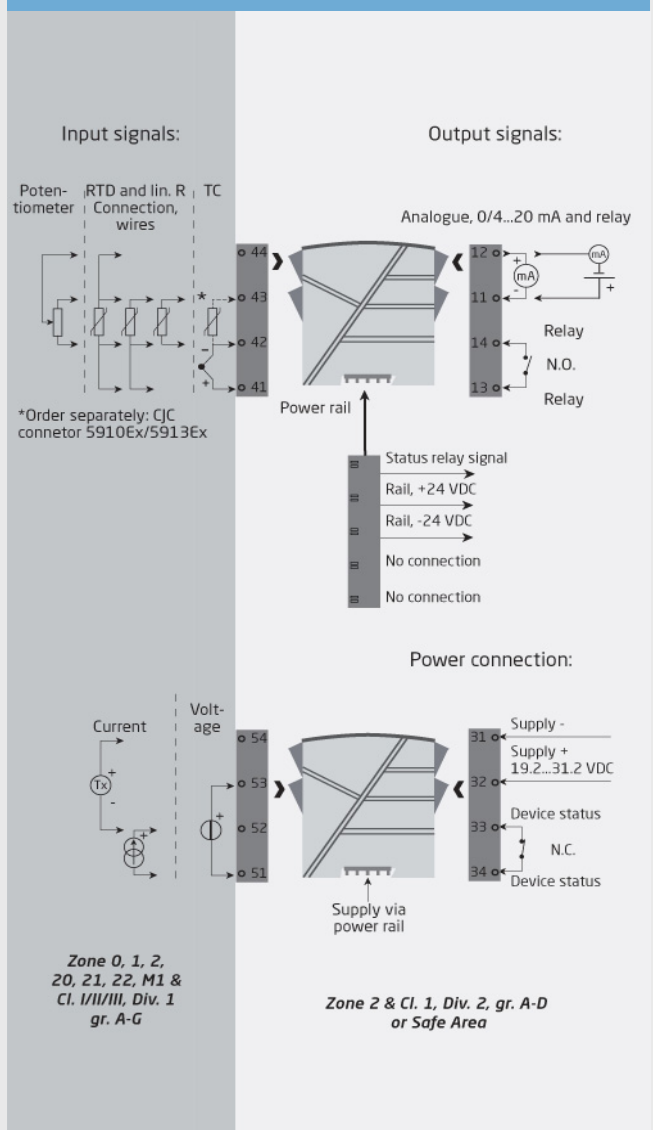

Order:

Type	Max. loop voltage
9116B	U ₀ 28 VDC : 1
	U ₀ 21.4 VDC : 2

Environmental Conditions

Specifications range.....	-20°C to +60°C
Storage temperature.....	-20°C to +85°C
Calibration temperature.....	20...28°C
Relative humidity.....	< 95% RH (non-cond.)
Protection degree.....	IP20
Installation in.....	Pollution degree 2 & measurement / overvoltage cat. II

Mechanical specifications

Dimensions (HxWxD).....	109 x 23.5 x 104 mm
DIN rail type.....	DIN EN 60715/35 mm
Wire size.....	0.13...2.08 mm ² AWG 26...14 stranded wire
Screw terminal torque.....	0.5 Nm
Vibration.....	IEC 60068-2-6 : 2007
Vibration: 2...13.2 Hz.....	±1 mm
Vibration: 13.2...100 Hz.....	±0.7 g

Common specifications

Supply

Supply voltage.....	19.2...31.2 VDC
---------------------	-----------------

Isolation voltage

Test /working: Input to any.....	2.6 kVAC / 300 VAC reinforced isolation
Analog output to supply.....	2.6 kVAC / 300 VAC reinforced isolation
Status relay to supply.....	1.5 kVAC / 150 VAC reinforced isolation

Response time

Temperature input, programmable (0...90%, 100...10%).....	1...60 s
mA / V input (programmable).....	0.4...60 s

Auxiliary supplies

9116B1: 2-w. sup. (term. 54...52).....	28...16.5 VDC / 0...20 mA
9116B2: 2-w. sup. (term. 54...52).....	22...16.5 VDC / 0...20 mA
Fuse.....	1.25 A SB / 250 VAC
Max. power consumption.....	≤ 3.5 W
Signal / noise ratio.....	Min. 60 dB (0...100 kHz)
Accuracy.....	Better than 0.1% of selected range

Input specifications

RTD input

RTD type.....	Pt10, Pt20, Pt50, Pt100, Pt200, Pt250, Pt300, Pt400, Pt500, Pt1000, Ni50, Ni100, Ni120, Ni1000
Cable resistance per wire (max.).....	50 Ω
Sensor current.....	Nom. 0.2 mA
Effect of sensor cable resistance (3-/4-wire).....	< 0.002 Ω / Ω
Sensor error detection.....	Programmable ON / OFF
Short circuit detection.....	Yes

TC input

Thermocouple type.....	B, E, J, K, L, N, R, S, T, U, W3, W5, LR
Cold junction compensation (CJC) via ext. sensor in connector 5910.....	20...28°C ≤ ±1°C, -20...20°C / 28...70°C ≤ 2°C

CJC via internally mounted

sensor.....	±(2.0°C + 0.4°C * Δt)
Δt =	Internal temperature-ambient temperature

Current input

Measurement range.....	0...20 mA
Programmable measurement ranges.....	0...20 and 4...20 mA
Input resistance.....	Nom. 20 Ω + PTC 50 Ω
Sensor error detection.....	Loop break 4...20 mA

Voltage input

Measurement range.....	0...10 VDC
Programmable measurement ranges.....	0/0.2...1, 0/1...5, 0/2...10 VDC
Input resistance.....	Nom. >10 MΩ

Output specifications

Current output

Signal range.....	0...20 mA
Programmable signal ranges.....	0...20 / 4...20 / 20...0 and 20...4 mA
Load (@ current output).....	≤ 600 Ω
Load stability.....	≤ 0.01% of span / 100 Ω
Sensor error indication.....	0 / 3.5 / 23 mA / none
NAMUR NE 43 Upscale/Downscale.....	23 mA / 3.5 mA
Current limit.....	≤ 28 mA

Relay output

Relay functions.....	Setpoint, Window, Sensor error, Power and Off
Max. voltage.....	250 VAC / 30 VDC
Max. current.....	2 AAC / 2 ADC
Max. AC power.....	500 VA / 60 W

Status relay

Max. voltage.....	110 VDC / 125 VAC
Max. current.....	0.3 ADC / 0.5 AAC
Max. AC power.....	62.5 VA / 32 W

2-wire 4...20 mA output: External

2-wire supply range.....	3.5...26 VDC
Signal range.....	4...20 mA
Max. load resistance [Ω].....	(V _{supply} - 3.5) / 0.023 A

Observed authority requirements

EMC.....	2014/30/EU
LVD.....	2014/35/EU

Approvals

ATEX 2014/34/EU.....	KEMA 10ATEX0053 X
IECEx.....	KEM 10.0022X
FM.....	3038267-C
INMETRO.....	NCC 12.1309 X
UL.....	UL 61010-1
EAC.....	TR-CU 020/2011
EAC Ex TR-CU 012/2011.....	RU C-DK.GB08.V.00410
CCOE.....	P337349/4
DNV Marine.....	Stand. f. Certific. No. 2.4
SIL.....	SIL 2 certified & fully assessed acc. to IEC 61508